

AFTERCARE INSTRUCTIONS

Your fitting has a high quality finish and should be treated with care to preserve the visible surfaces.

All surface finishes will wear if not cleaned correctly, the only safe way to clean your mixer is to wipe with a soft damp cloth. Stains can be removed using washing up liquid. All bath cleaning powders and liquids will damage the surface of your fitting, even the non-scratch cleaners.

GUARANTEE

All products are manufactured to the highest standards and a 5 year guarantee covers any defect in manufacture.

As gold and special effect finishes are softer than chromium plate, special care must be taken when cleaning, a 3 year guarantee covers these finishes.

NOTE: The 5-year guarantee on the cartridge is invalidated if damaged by any waterborne debris.

In the interests of continuous product development we reserve the right to alter specification as necessary

PRODUCT CODE: J WMBF C

PRODUCT IDENTIFICATION CODE LASER ETCHED ON PRODUCT

Installer please fill in code here _____.

TELEPHONE HELPLINE! +44 (0)844 701 6273

Bristan Group Limited
Birch Coppice Business Park
Dordon
Tamworth
Staffordshire
B78 1SG
UK
A Masco Company
Website: www.bristan.com
Telephone: +44 (0) 844 701 6274
Facsimile: +44 (0) 844 701 6275
Email: enquire@bristan.com

BRISTAN

Java Wall Mounted Bath Filler

Fitting Instructions & Contents List

Please keep these instructions for future reference and request of replacement part

WATER PRESSURE

This mixer is only suitable for use at mains supply pressures (Minimum 1.0 bar). For optimum use both the hot and cold supplies should be reasonably balanced. Where the supplies are unbalanced, i.e. Hot water for the cylinder tank/cold from the mains, approved check valves must be fitted in the supply pipes.

This mixer should be installed in compliance with Water Regulations. For further details contact your Local Water Authority.

INSTALLATION

1. Identify all components and check for completeness, particularly before arranging fitting.

Please note: As there are no backnuts or fixings plates supplied, the bath filler needs to be connected/supported with rigid pipe work.


2. Fit and seal the elbows into the wall connections, ½”BSP female (not supplied).
3. Fit the flange covers and mixer body to the elbows using the large sealing washers and connect the hot and cold water supplies.
4. Fully open the mixer in the mid position, letting it run for a few minutes to flush the system.
5. Check all joints and connections for leaks.
6. See over the page for aftercare instructions.

MAINTENANCE

If any of the fittings begin to drip:

1. Turn off the water supply.
2. Remove handle by unscrewing shroud, and then unscrewing from the cartridge retaining nut. Then unscrew cartridge retaining nut and remove the cartridge from the body.
3. Once removed, carefully clean seating and all exposed parts.
4. Replace all of the above then on the water supply.
5. If problem persists contact our helpline quoting the product code.

DIAGRAM

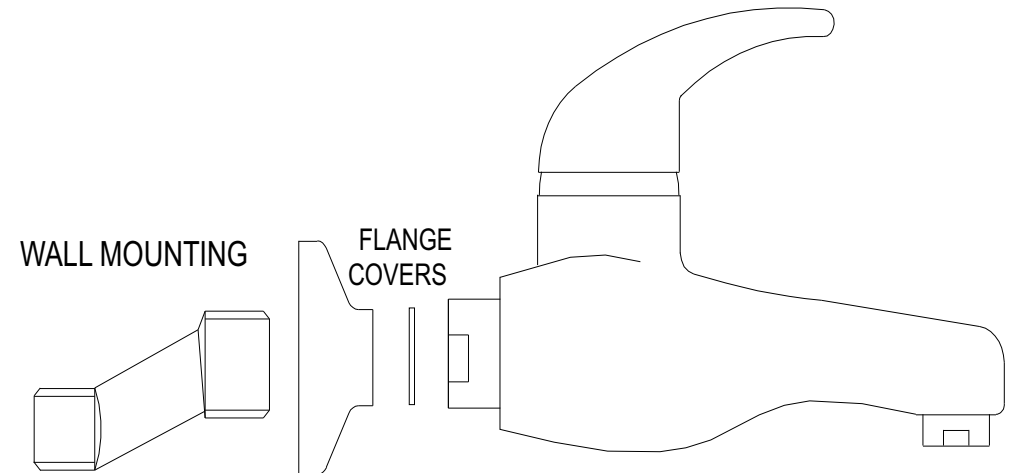

Please Note: In the unlikely event you find a part missing please contact our Customer Service Helpline on **0844 701 6273** or e-mail **enquire@bristan.com** for immediate despatch of part.