

## Ecostat

### Thermostatic shower mixer Universal for exposed installation

Surfaces: **chrome** Art. no. : **13122000**



#### Description

##### product features

- designed to run 1 outlet
- exposed design allows easy installation, all working parts are outside of the wall
- Centre distance: 150 mm  $\pm$  12 mm
- Ecostop button limits the water consumption to 10 l/min
- flow rate hand shower connection 17 l/min at 3 bar
- thermostat cartridge, ceramic valve 180°
- Min. operating pressure: 1 bar
- Max. operating pressure: 10 bar
- safety stop at 40°C
- Maximum temperature can be adjusted on installation
- Non-return valve
- Noise class: I
- dirt filter included
- WRAS 1511311
- Kiwa UK 1508715

#### Article Details

Price excl. VAT

£ 158.33

#### Certificates


**kiwa**



#### Product image



#### Scale drawing

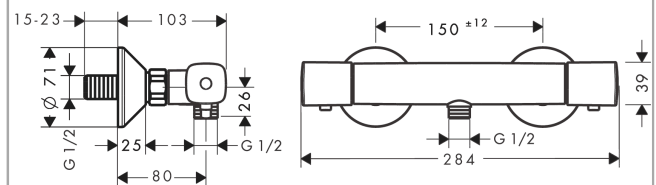

**Ecostat**

**Thermostatic shower mixer Universal for exposed installation**

Surfaces: **chrome** Art. no. : **13122000**



**Flowchart**

