## hansgrohe

## ShowerTablet Select Thermostatic mixer 700 Universal for exposed installation for 2 outlets Surfaces: chrome Art. no. : 13184000

### Description

#### product features


- · designed to run 2 outlets
- · simultaneous utilisation by 2 outlets
- exposed design allows easy installation, all working parts are outside of the wall
- · Centre distance: 150 mm
- · flow rate hand shower connection 14 l/min at 3 bar
- · flow rate upper outlet 28 l/min at 3 bar
- · start/ stop cartridge, thermostat cartridge
- · Min. operating pressure: 1 bar
- · Max. operating pressure: 10 bar
- safety stop at 40°C
- · Maximum temperature can be adjusted on installation
- · with isolated water conduction
- · Non-return valve
- · made of safety glass
- surface of the shelf at colour variant -000 = mirror glass, at colour variant -400 = white glass
- control of an external shower or bath tub filler via concealed connection G ½ possible
- · Noise class: I
- · dirt filter included
- Thermostat is delivered with buttons Rain large and hand shower
- · cannot be connected with a standard fixing plate
- if running with a pump, please specify a universal (negative head) pump




# hansgrohe


## ShowerTablet Select Thermostatic mixer 700 Universal for exposed installation for 2 outlets Surfaces: chrome Art. no. : 13184000



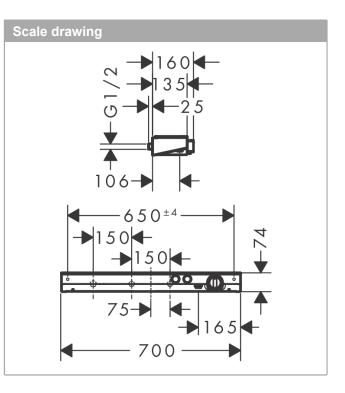



## ShowerTablet Select Thermostatic mixer 700 Universal for exposed installation for 2 outlets Surfaces: chrome Art. no. : 13184000

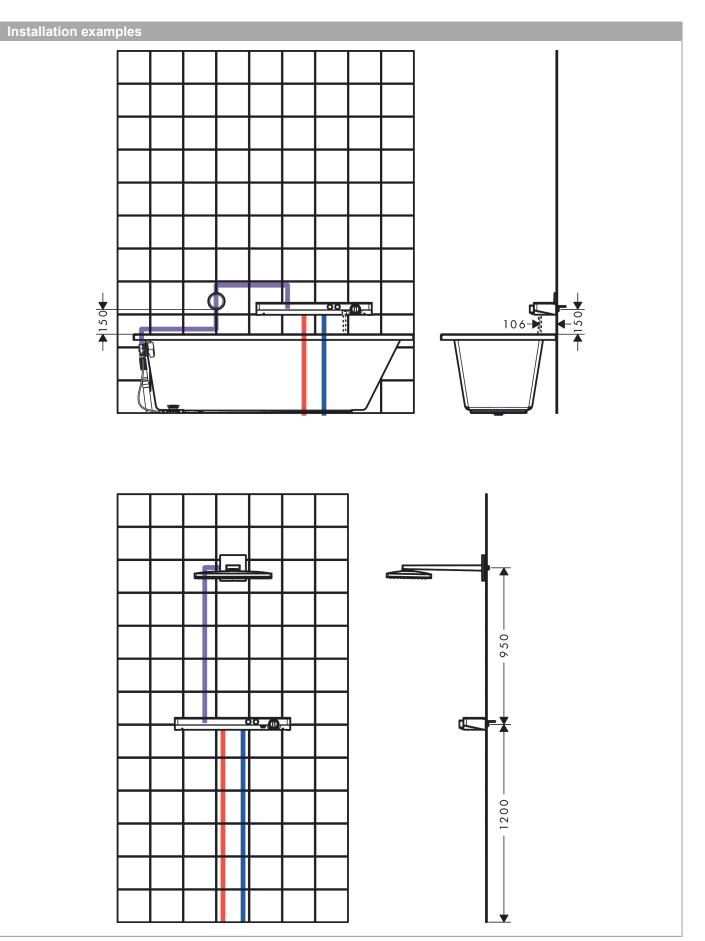

0.5