

ShowerTablet Select**Thermostatic mixer 700 Universal for exposed installation for 2 outlets**Surfaces: **white/chrome** Art. no. : **13184400****Description****product features**

- designed to run 2 outlets
- simultaneous utilisation by 2 outlets
- exposed design allows easy installation, all working parts are outside of the wall
- Centre distance: 150 mm
- flow rate hand shower connection 14 l/min at 3 bar
- flow rate upper outlet 28 l/min at 3 bar
- start/ stop cartridge, thermostat cartridge
- Min. operating pressure: 1 bar
- Max. operating pressure: 10 bar
- safety stop at 40°C
- Maximum temperature can be adjusted on installation
- with isolated water conduction
- Non-return valve
- made of safety glass
- surface of the shelf at colour variant -000 = mirror glass, at colour variant -400 = white glass
- control of an external shower or bath tub filler via concealed connection G ½ possible
- Noise class: I
- dirt filter included
- Thermostat is delivered with buttons Rain large and hand shower
- cannot be connected with a standard fixing plate
- if running with a pump, please specify a universal (negative head) pump

Article Details

Price excl. VAT

£ 1,091.67

Technology**Design awards**reddot award 2015
winner**Certificates****kiwa**


ShowerTablet Select
Thermostatic mixer 700 Universal for exposed installation for 2 outlets
 Surfaces: **white/chrome** Art. no. : **13184400**




Product image



Scale drawing

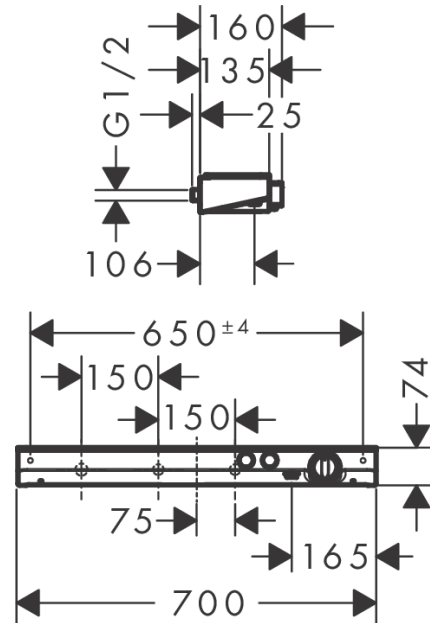

Flowchart

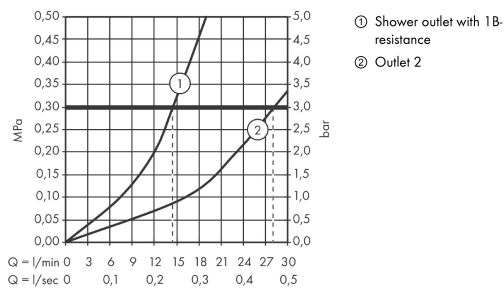

ShowerTablet Select
Thermostatic mixer 700 Universal for exposed installation for 2 outlets
 Surfaces: **white/chrome** Art. no. : **13184400**



Installation examples

