

ShowerSelect Glass
Thermostatic mixer for concealed installation for 1 outlet
 Surfaces: **white/chrome** Art. no. : **15737400**



Description

product features

- designed to run 1 outlet
- Select push-button on / off control for 1 outlet
- wall-mounted
- flow rate hand shower connection 26 l/min at 3 bar
- thermostat cartridge, start/ stop cartridge
- Min. operating pressure: 1 bar
- Max. operating pressure: 10 bar
- safety stop at 40°C
- Maximum temperature can be adjusted on installation
- Thermostat is delivered with button On/Off
- if running with a pump, please specify a universal (negative head) pump
- winner of the iF product design award 2015
- WRAS 1503309

Article Details

Price excl. VAT £ 633.33

Technology



Design awards




Certificates



Product image



Scale drawing

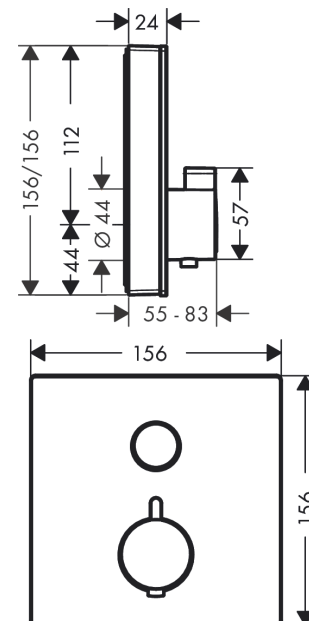

ShowerSelect Glass
Thermostatic mixer for concealed installation for 1 outlet
 Surfaces: **white/chrome** Art. no. : **15737400**



Flowchart

