

ShowerSelect S
Mixer for concealed installation for 2 outlets
 Surfaces: **chrome** Art. no. : **15748000**



Description

product features

- designed to run 2 outlets
- multiple outlets can be run simultaneously
- Connection type: basic set
- flow rate upper outlet 20 l/min at 3 bar
- flow rate upper outlet 20 l/min at 3 bar
- ceramic cartridge for temperature control, start/ stop cartridge
- Min. operating pressure: 1 bar
- Max. operating pressure: 10 bar
- Maximum temperature can be adjusted on installation
- Thermostat is delivered with buttons hand shower and Rain large
- if running with a pump, please specify a universal (negative head) pump
- buttons provided: hand shower and overhead shower
- different symbol buttons can be ordered separately
- WRAS 1503028

Article Details

Price excl. VAT £ 466.67

Technology




Certificates



Product image



Scale drawing

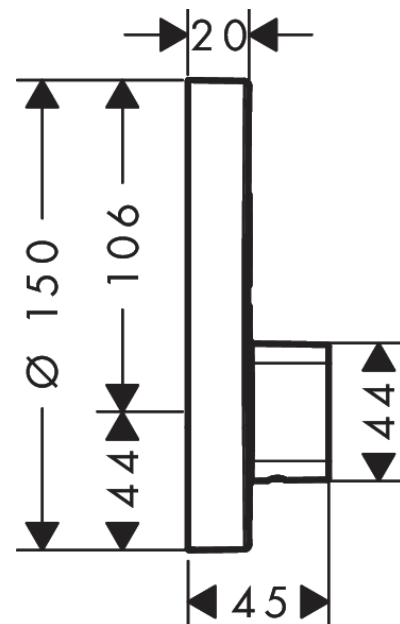

ShowerSelect S
Mixer for concealed installation for 2 outlets
 Surfaces: **chrome** Art. no. : **15748000**



Flowchart

