


TECHNICAL DATASHEET

Jute

Jute Bath Shower Mixer

Product Specification

| | |
|--------------------------------|--|
| Product Code: | JU BSM E6 C, JU BSM E8 C |
| Finish: | Chrome Plated |
| Product Type: | Contemporary |
| Construction: | Body is of brass construction and is designed to conform to BS EN 200. |
| Valve Type: | ¾", ¼ turn ceramic disc valves |
| Supply: | Suitable for all plumbing systems (Preferably balanced) |
| Inlet Connections: | ¾" BSP |
| Outlet Connection: | G ½" |
| Working Pressures: | Min 0.2bar, Max 8.0bar |
| Dimensions for Fitting: | 180mm inlet centres |

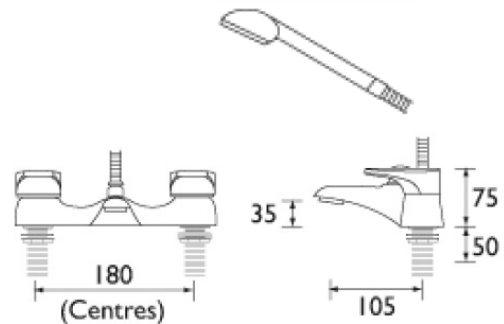

1500mm HOSE, RUB CLEAN HANDSET & WALL BRACKET

Additional Information

- Supplied with metal handles
- Chrome plated to BS EN 248
- Supplied with single function rub clean handset, 1.5m hose & wall bracket
- Product supplied with either a 6 or 8 litre per minute flow regulator which can be fitted to the shower hose outlet to reduce water consumption and increase water efficiency (Flow Regulator accurate +/- 10%).

Technical Advice: For further information please call 0844 7016273 or email customer care@bristan.com

Guarantee: 5 years covering manufacturing faults.

Compliance/Approvals

Manufactured to comply with WRAS

Flow Rates (litres per minute)

| System Pressure | 0.2bar | 0.5bar | 1bar | 2bar | 3bar | 5bar |
|---|--------|--------|------|------|------|------|
| To Bath Fill | 20.7 | 34.2 | 48.9 | 69.4 | 85.0 | -- |
| Without Flow Regulator Fitted (To Shower Outlet) | 3.1 | 5.5 | 8.3 | 12.5 | 16.5 | -- |
| With 6 l/p/m Flow Regulator Fitted (To Shower Outlet) | -- | -- | 6.0 | 6.0 | 6.0 | 6.0 |
| With 8 l/p/m Flow Regulator Fitted (To Shower Outlet) | -- | -- | 8.0 | 8.0 | 8.0 | 8.0 |