TECHNICAL DATA SHEET

BRISTAN

1901

Exposed Concentric Chrome Shower Valve with Diverter & Rigid Riser Kit

Product Specification

Product Code:

Finish.

Connection Inlet:

Maximum Temperature:

Pressure Range: $0.1 - 5.0 \, \text{Bar}$


Dimensions for Fitting: 136mm – 158mm adjustable inlet centres


Additional Information


• Chrome plated to BS EN 248:2002

- •Traditional shower kit with external diverter, shower rose, rigid riser and handset
- •Supplied with 2x 8 litres per minute flow regulators
- •Adjustable inlet centres mean you can use existing pipework with centres measuring anything between 136mm and 158mm.
- Factory fitted regulators means this is a water saving shower
- Matching taps available

Flow Rates (litres per minute)

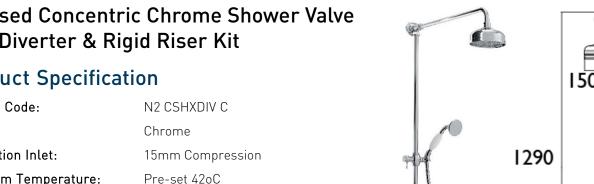





136-158

| System Pressure | 0.1bar | 0.2bar | 0.5bar | 1bar | 2bar | 3bar | 5bar |
|---|--------|--------|--------|------|------|-------|-------|
| Through Handset with Flow Regulators | | | 6.7 | 9.9 | 10.4 | 11.3 | 9.8 |
| Through Handset without Flow Regulators | 2.7 | 3.8 | 7.2 | 10.7 | 15.5 | 18.98 | 24.51 |
| Through Rose with Flow Regulators | | | 8.9 | 10.7 | 11.4 | 11.6 | 9.8 |
| Through Rose without Flow Regulators | 3.6 | 5.7 | 10.3 | 15.6 | 22.7 | 27.8 | 35.89 |

Technical Advice: For further information please call 0844 7016273

or email customercare@bristan.com

5 years covering manufacturing faults. Guarantee:

Max. 13







Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG Telephone: 0844 701 6274 Facsimile: 0844 701 6275 Web Site: www.bristan.com Email: enquire@bristan.com