

1901

Recessed Thermostatic Dual Control Shower Valve with Integral Two Outlet Diverter Chrome

Product Specification

Product Codes & Finishes: N2 SHCDIV C (Chrome)
N2 SHCDIV G (Vintage Gold)


Product Type: Contemporary

Construction: Body is of brass construction

Supply: Suitable for all plumbing conditions, preferably balanced.

Inlet Connections: 15mm Compression connections


Working Pressures: Min 0.2 Bar, Max 5.0 Bar

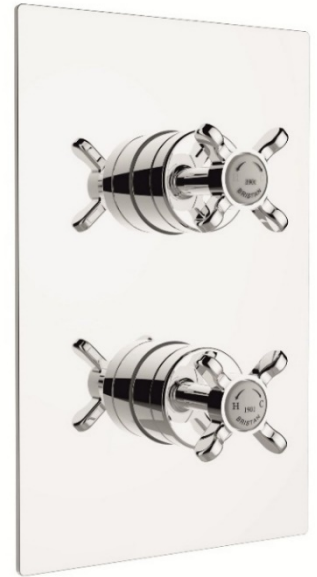

Chrome Pictured

Additional Information

- Chrome plated to BS EN 248
- Suitable for cavities between 45-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Flow rate at 0.2 Bar (open outlet without flow regulators) is 8 l/min
- Fully serviceable from the front

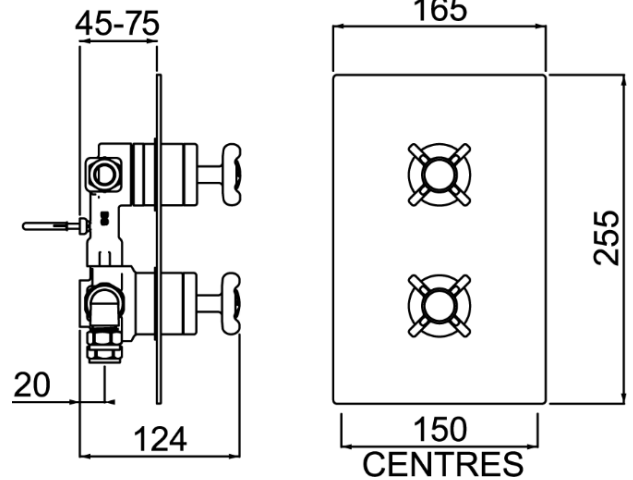

Flow Rates (litres per minute)


System Pressure	0.2bar	0.5bar	1.0bar	2.0bar	3.0bar	5.0bar
Outlet 1	8.5	13.44	19	26.87	32.91	42.49
Outlet 2	8.27	13.08	18.5	26.16	32.04	41.37

Compliance / Approvals

WRAS Approval No: 1507042

Technical Advice: For further information please call 0844 7016273 or email customer care@bristan.com

Guarantee: 5 years covering manufacturing faults.

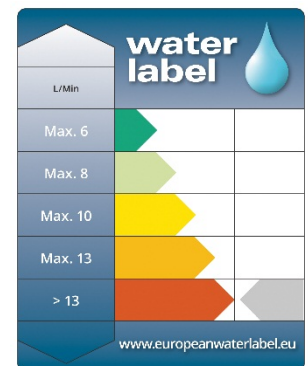

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG
Telephone: 0844 701 6274 Facsimile: 0844 701 6275
Web Site: www.bristan.com Email: enquire@bristan.com



Guarantee Delivery 0844 7016273

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.