## PRISM SHWR PK4



## Features:

- Integral two outlet diverter
- 200mm round fixed head with shower arm
- Single function bar handset and hose with integral handset holder and wall outlet

## Product Certifications:




DATA

SI

Specification							
Style:	Contemporary						
Finish/Colour:	Chrome Plated						
Main Construction Material:	Brass; ABS						
No of Controls:	3						
Shower Type:							
Shower Head Type:							
Valve/Cartridge Type:							
Maximum Hot Water Supply Temperature <sup>o</sup> C:	65						
Maximum Static Pressure: (bar)	10						
Plumbing System Suitability:	Suitable for all plumbing systems						
Working Pressure Range:	Min: 0.2 bar, Max: 5 bar						
Connection Inlet:	15mm Compression						
Connection Outlet:	G 1/2"						
Isolation Valve Included:	ncluded: No						
Check Valve Included:	Yes						

## Dimensions (measurements in mm)

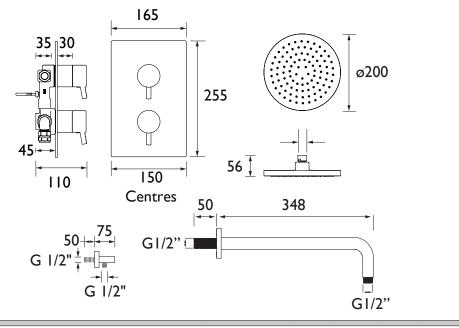

TAPS & SHOWERS

D1

	For more products, visit our website:	Flow Rates (I/min)							
	http://www.bristan.com	System Pressure (bar)	0.2	0.5	1	2	3	5	
	「「「「「「「」」」	Outlet 1	8.73	13.8	19.52	27.6	33.8	43.64	
		Outlet 2	8.54	13.5	19.09	27	33.07	42.69	
	L 37 K 40								
	TECHNICAL	20 QUALATA					iiiii TT		

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Telephone: 0844 701 6274. Facsimile: 0844 701 6275. Web Site: www.bristan.com Email: enquire@bristan.com. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.