

SM BAS C

SMILE Tap Range Smile Basin Mixer with Clicker Waste Chrome



Features:

- Metal handles
- Chrome plated to BS EN 248

Product Certifications:




For more products, visit our website:



Specification

Style:	Contemporary
Product Type:	Bathroom Taps
Finish/Colour:	Chrome
Main Construction Material:	Brass
Mount Type:	Deck Mounted
Handle Type:	Single Lever
Connection Inlet:	M10 x 500mm 1/2BSP Flexi Tails
Number of Tap Holes Required:	1
Valve/Cartridge Type:	¼ Turn ½" Ceramic Disc Cartridge
Plumbing System Suitability	All
Working Pressure Range:	Min. 0.2 Bar, Max. 5.0 Bar
Maximum Hot Water Temperature: °c	65
Maximum Dynamic Pressure: (bar)	5
Maximum Static Pressure: (bar)	10
Flow Type:	Single
Flow Rate: (l/min @ 3 bar)	25.4
Connection Outlet:	M24 Flow Straightener
Isolation Included:	No

Dimensions (measurements in mm)

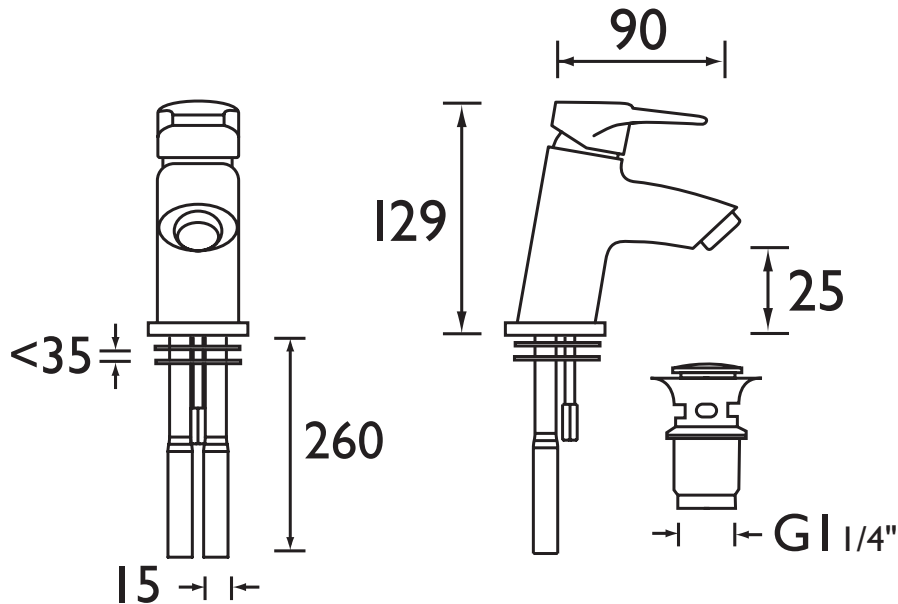

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
SM BAS C	5.7	9.9	14.3	20.4	25.4	32.8

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS

D3