BTZ 3/4 C

BLITZ Tap Range Blitz Bath Taps Chrome



Features

- Supplied with Metal Backnuts
- Supplied with CD Valves

Specification				
Style:	Contemporary			
Product Type:	Taps			
Finish/Colour:	Chrome			
Main Construction Material:	Brass			
Mount Type:	Deck Mounted			
Handle Type:	Lever			
Connection Inlet:	3/4" BSP			
Number of Tap Holes Required:	2			
Valve/Cartridge Type:	1/4 Turn 3/4" CD Valves			
Plumbing System Suitability	Suitable for all plumbing systems			
Working Pressure Range:	Min 0.2 Max 5.0 Bar			
Maximum Hot Water Temperature: °c	65			
Maximum Dynamic Pressure: (bar)	5			
Maximum Static Pressure: (bar)	10			
Flow Type:	Dual			
Flow Rate: (I/min @ 3 bar)	60.7			
Connection Outlet:	N/A			
Isolation Included:	No			

Dimensions (measurements in mm)


Product Certifications:

Wras Approval No. 1311084N



For more products, visit our website:



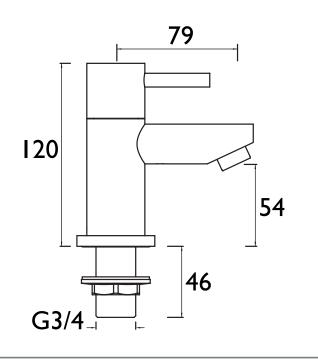

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
BTZ 3/4 C	15.6	24.5	35.1	49.6	60.7	78.4		

TECHNICAL DATA SHEET

BRISTAN TAPS & SHOWERS D3

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Telephone: 0844 701 6274. Facsimile: 0844 701 6275. Web Site: www.bristan.com Email: enquire@bristan.com. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.