VAC BAS E4 C MT

CLUB Tap Range Club Basin Mixer Eco4 with Metal Heads



Features:

- Supplied with metal handles
- Supplied with metal fixing nut
- Product supplied with a 3.5 litre per minute flow regulator which can be fitted to the spout outlet to reduce water consumption and increase water efficiency
- Chrome plated to BS EN 248


Product Certifications:

For more products, visit our website:



| Specification | | | | | |
|-----------------------------------|--------------------------|--|--|--|--|
| Style: | Contemporary | | | | |
| Product Type: | Bathroom Taps | | | | |
| Finish/Colour: | Chrome | | | | |
| Main Construction Material: | Brass | | | | |
| Mount Type: | Deck | | | | |
| Handle Type: | Handwheel | | | | |
| Connection Inlet: | 1/2" BSP Flexible Tails | | | | |
| Number of Tap Holes Required: | 1 | | | | |
| Valve/Cartridge Type: | 40mm Ceramic Cartridge | | | | |
| Plumbing System Suitability | All | | | | |
| Working Pressure Range: | Min 0.2 Bar, Max 7.0 Bar | | | | |
| Maximum Hot Water Temperature: °c | 65 | | | | |
| Maximum Dynamic Pressure: (bar) | 7 | | | | |
| Maximum Static Pressure: (bar) | 10 | | | | |
| Flow Type: | Single Flow | | | | |
| Flow Rate: (I/min @ 3 bar) | 34.9 | | | | |
| Connection Outlet: | | | | | |
| Isolation Included: | No | | | | |

Dimensions (measurements in mm)

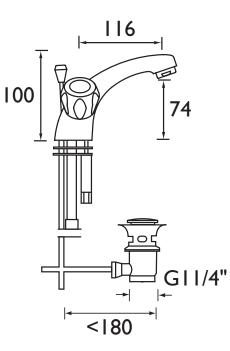

| Flow Rates (I/min) | | | | | | | | |
|-------------------------|-----|------|-----|------|------|------|--|--|
| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 | | |
| With Flow Regulators | | | 3.5 | 3.5 | 3.5 | 3.5 | | |
| Without Flow Regulators | 9.1 | 12.7 | 20 | 28.5 | 34.9 | 45.1 | | |







Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Telephone: 0844 701 6274. Facsimile: 0844 701 6275. Web Site: www.bristan.com Email: enquire@bristan.com The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.